

报告编号:

测试时间: 2023-6-1 14:36:16

灯具光度测试报告

灯具属性

生产工厂: 0

灯具规格:

光源规格:

发光面宽度: 80 mm

发光面长度: 80 mm

发光面高度: 80 mm

电压(V): 220.80 V

电流(A): 0.0476 A

功率(W): 6.27 W

功率因数: 0.5960

光源光通量: 413.44

光度结果

CIE 等级: Direct

灯具光通量: 413.4369 lm

下射光通比: 100.00%

灯具光效(LER): 65.94 lm/W

光束角(50%) C0-180,C90-270: 55.1,53.0

视场角(10%) C0-180,C90-270: 76.1,75.4

距高比S/MH C0-180,C90-270: 0.933,0.890

最大光强: 560.89 cd

最大光强角: C=270 Gamma=11

上射光通比: 0.00%


灯具效率: 100.00%

中心光强: 518.13 cd


有效光通量: 390.63 lm

光通量ERP(φ use)120度: 413.40 lm

灯具图片



光强分布曲线

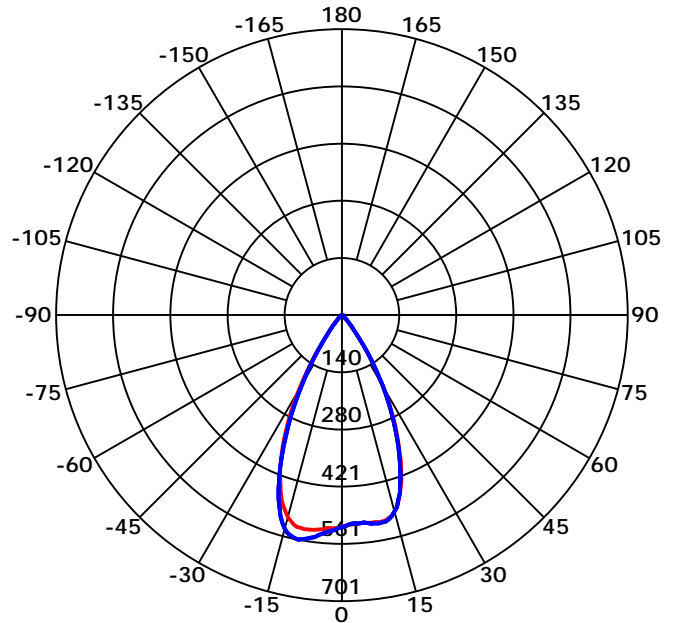

光束角(50%) C0-180,C90-270: 55.1 deg,53.0 deg

C0-180 ——— C90-270 ———

C角度范围: 0 - 360 Deg

C角度间隔: 45.0 Deg

测试速度: High

环境温度:

测试人员:

测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg

G角度间隔: 1.0 Deg



测试系统: Huipu CPM-1800B Goniophotometer

环境湿度:

测试距离: 9.22 m

备注:


光强分布曲线

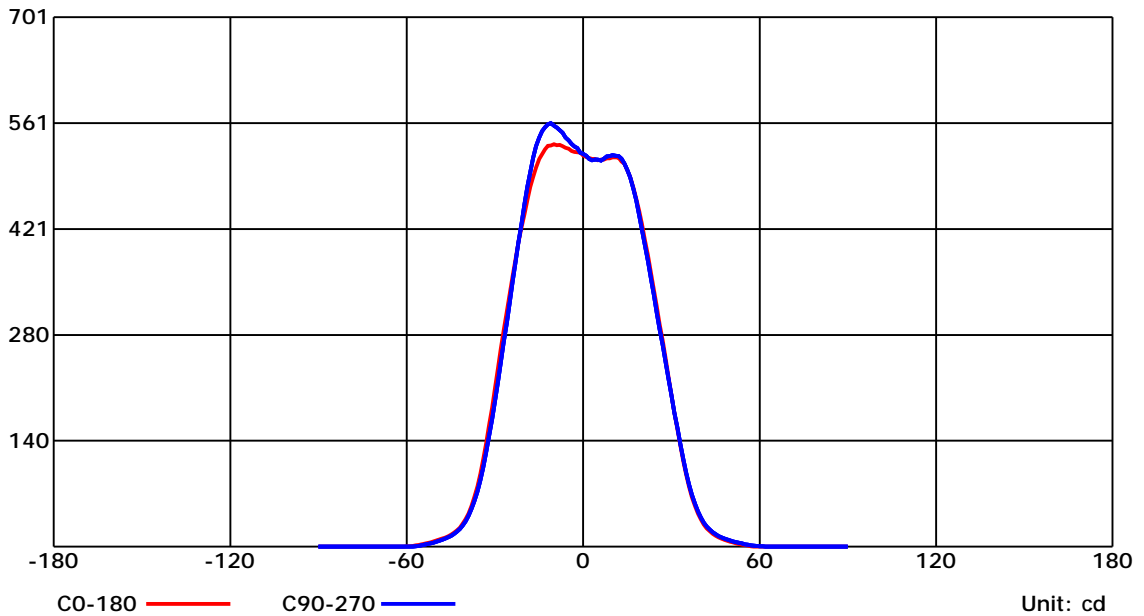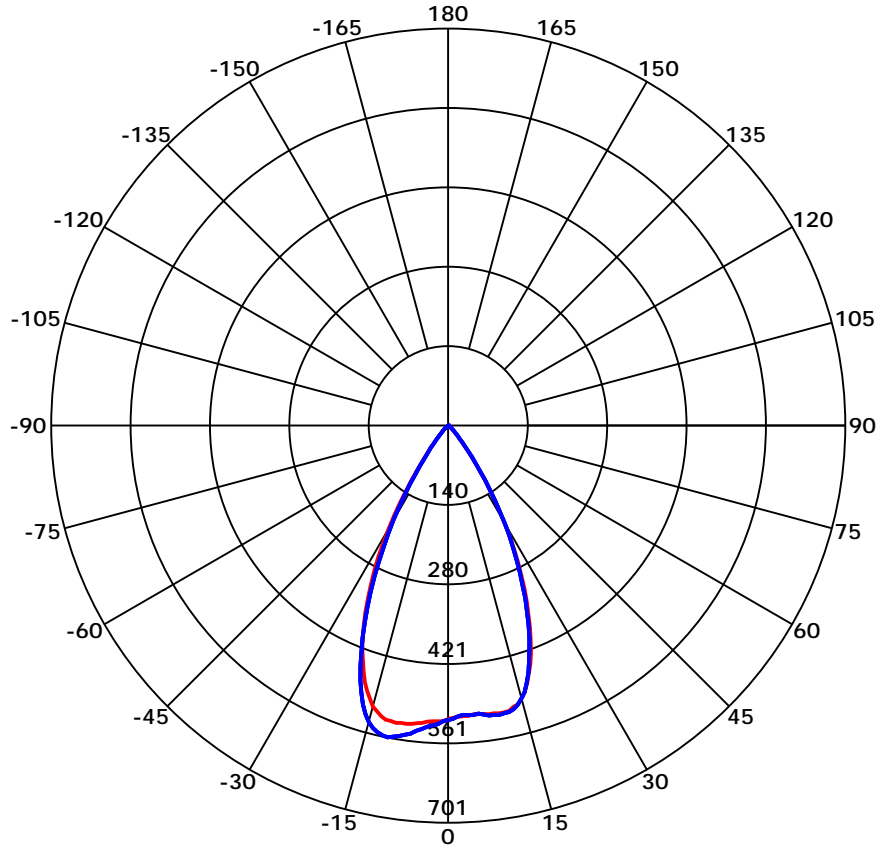

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

光强分布曲线

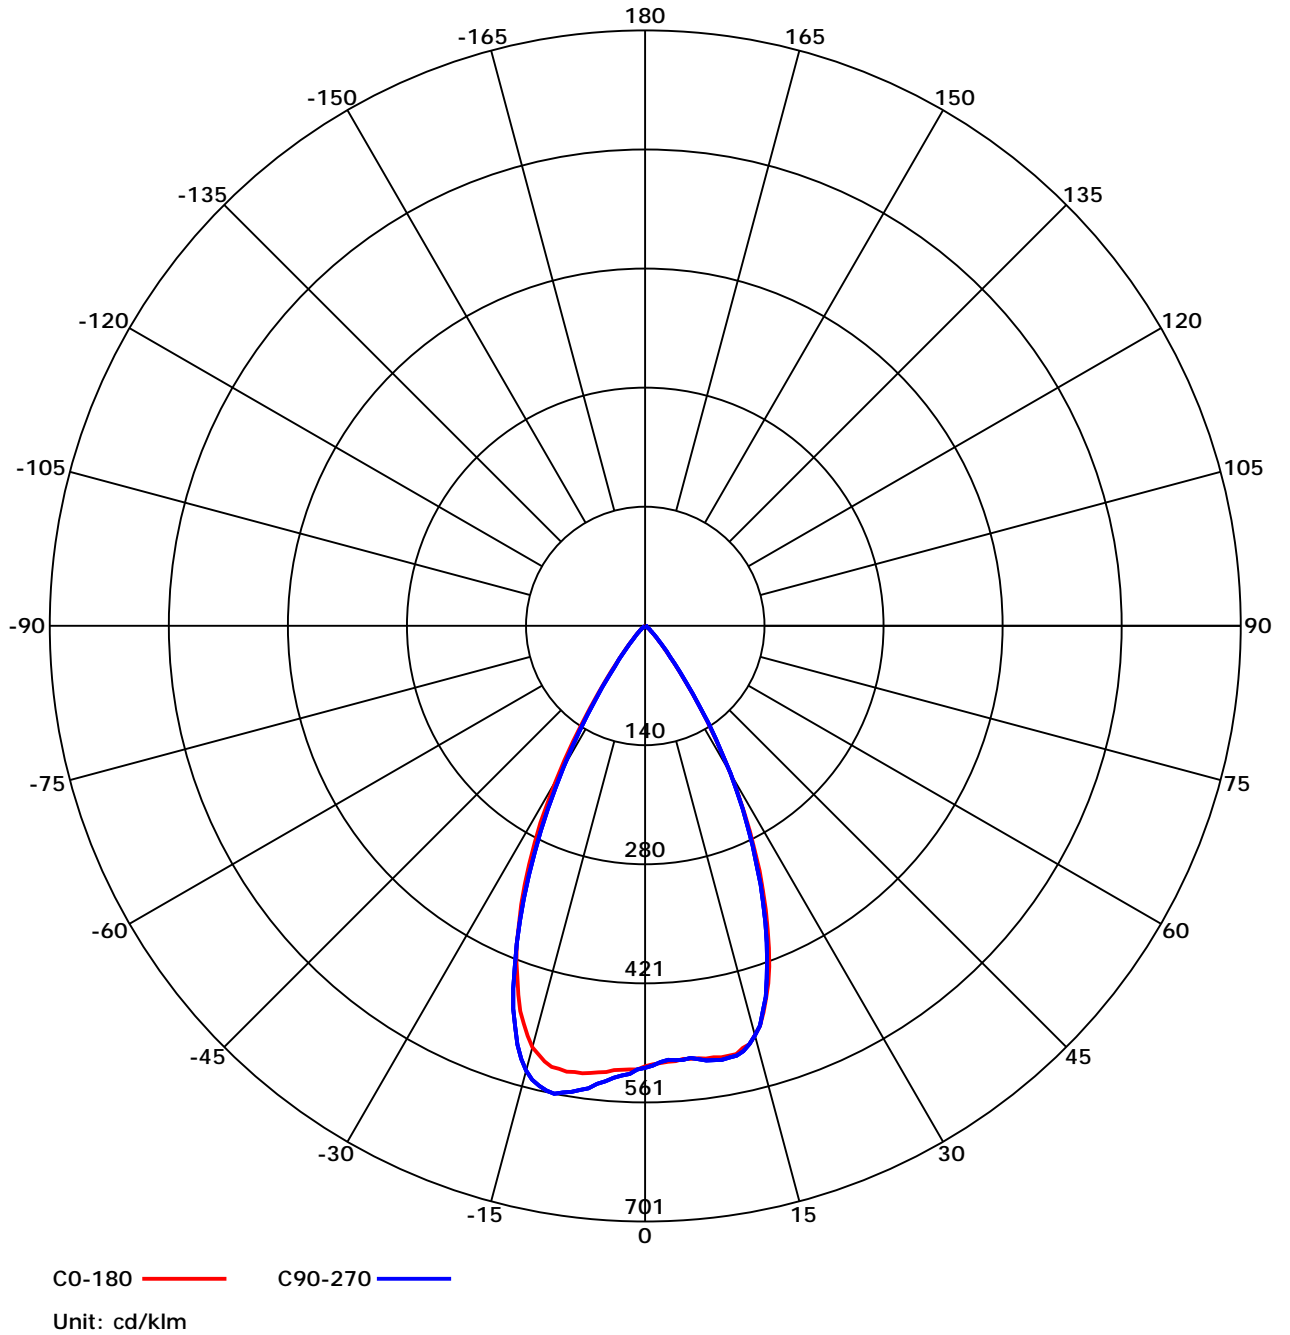


C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

利用系数图表(TM5)

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.06	1.04	1.03	1.04	1.02	1.01	1.01	0.98	0.97	0.96	0.94	0.92	0.89	0.87	0.85	0.80
2	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.95	0.93	0.93	0.90	0.88	0.87	0.84	0.82	0.77
3	0.98	0.97	0.95	0.97	0.95	0.93	0.94	0.91	0.89	0.90	0.87	0.85	0.85	0.82	0.79	0.75
4	0.95	0.93	0.92	0.94	0.92	0.90	0.91	0.88	0.86	0.87	0.84	0.82	0.83	0.79	0.77	0.72
5	0.92	0.90	0.90	0.91	0.89	0.87	0.88	0.85	0.83	0.85	0.81	0.79	0.81	0.77	0.74	0.70
6	0.89	0.88	0.87	0.88	0.86	0.85	0.85	0.83	0.81	0.82	0.79	0.77	0.79	0.75	0.72	0.68
7	0.87	0.85	0.84	0.85	0.84	0.82	0.83	0.80	0.78	0.80	0.77	0.74	0.77	0.73	0.70	0.66
8	0.84	0.83	0.82	0.83	0.81	0.80	0.81	0.78	0.76	0.78	0.75	0.72	0.75	0.71	0.68	0.65
9	0.82	0.81	0.80	0.81	0.79	0.78	0.78	0.76	0.74	0.76	0.73	0.70	0.73	0.69	0.66	0.63
10	0.80	0.79	0.78	0.79	0.77	0.76	0.76	0.74	0.72	0.74	0.71	0.69	0.71	0.67	0.65	0.61


概算曲线

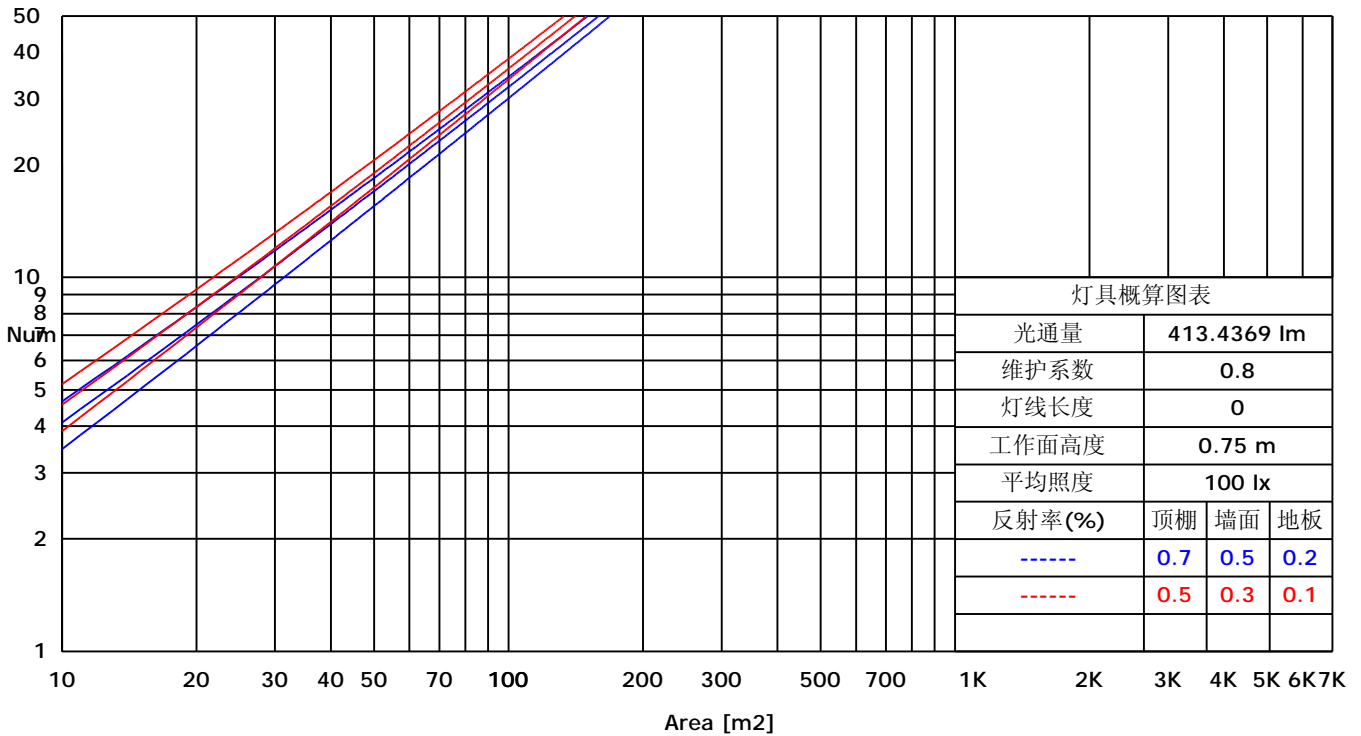

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

矩形等光强曲线

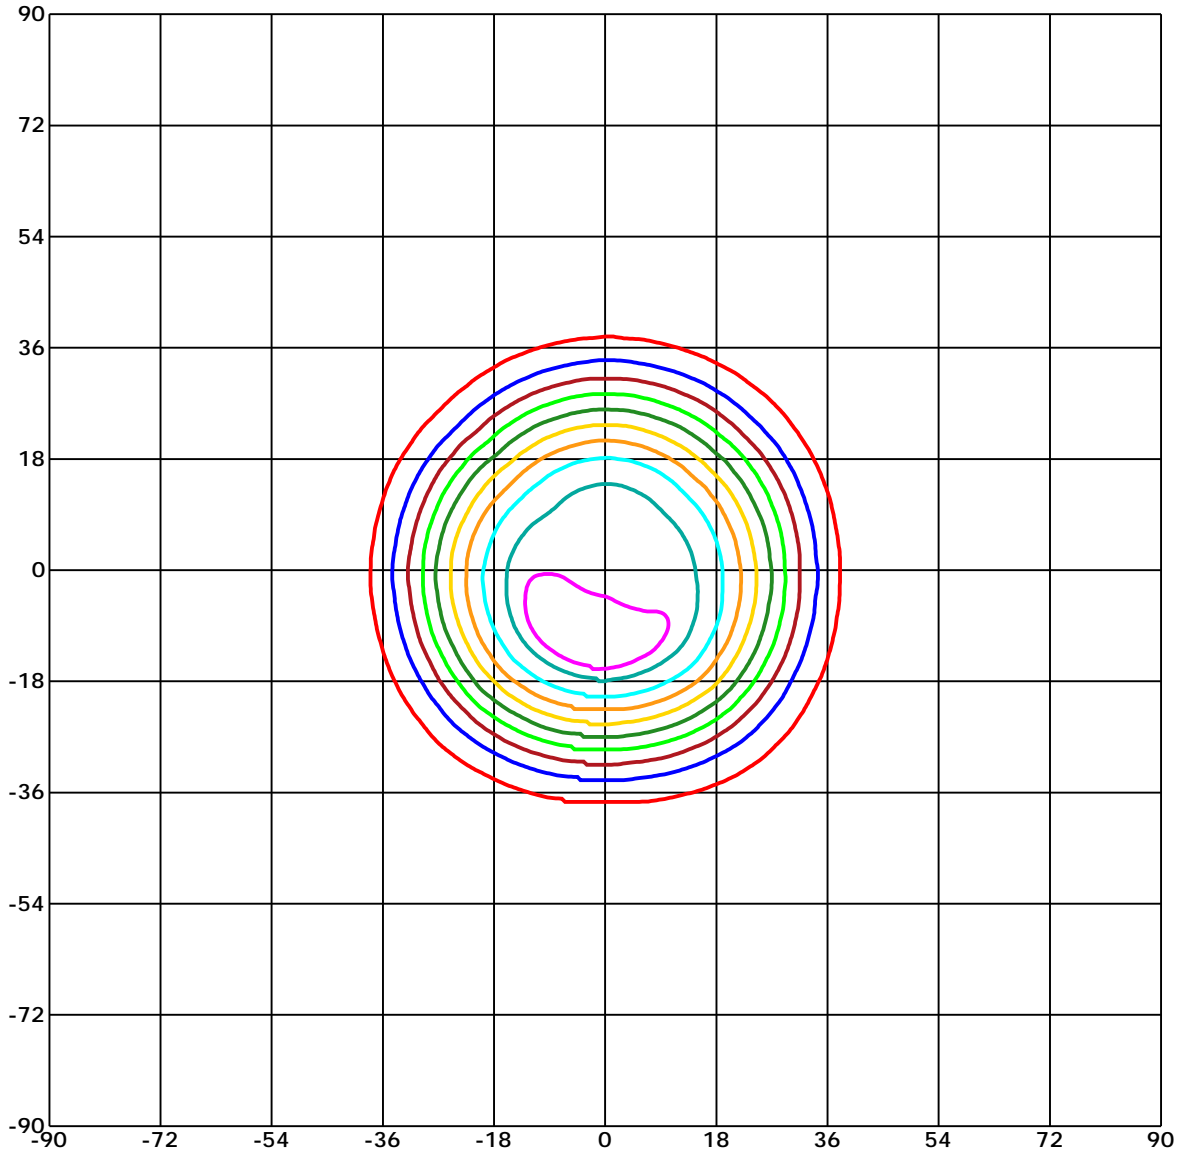


Unit of intensity:cd I_{max}(100%): 560.885 cd

- | | |
|---------------------------------|---------------------------------|
| — 532.841(95%I _{max}) | — 280.443(50%I _{max}) |
| — 504.797(90%I _{max}) | — 224.354(40%I _{max}) |
| — 448.708(80%I _{max}) | — 168.266(30%I _{max}) |
| — 392.62(70%I _{max}) | — 112.177(20%I _{max}) |
| — 336.531(60%I _{max}) | — 56.089(10%I _{max}) |

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

球面等光强曲线

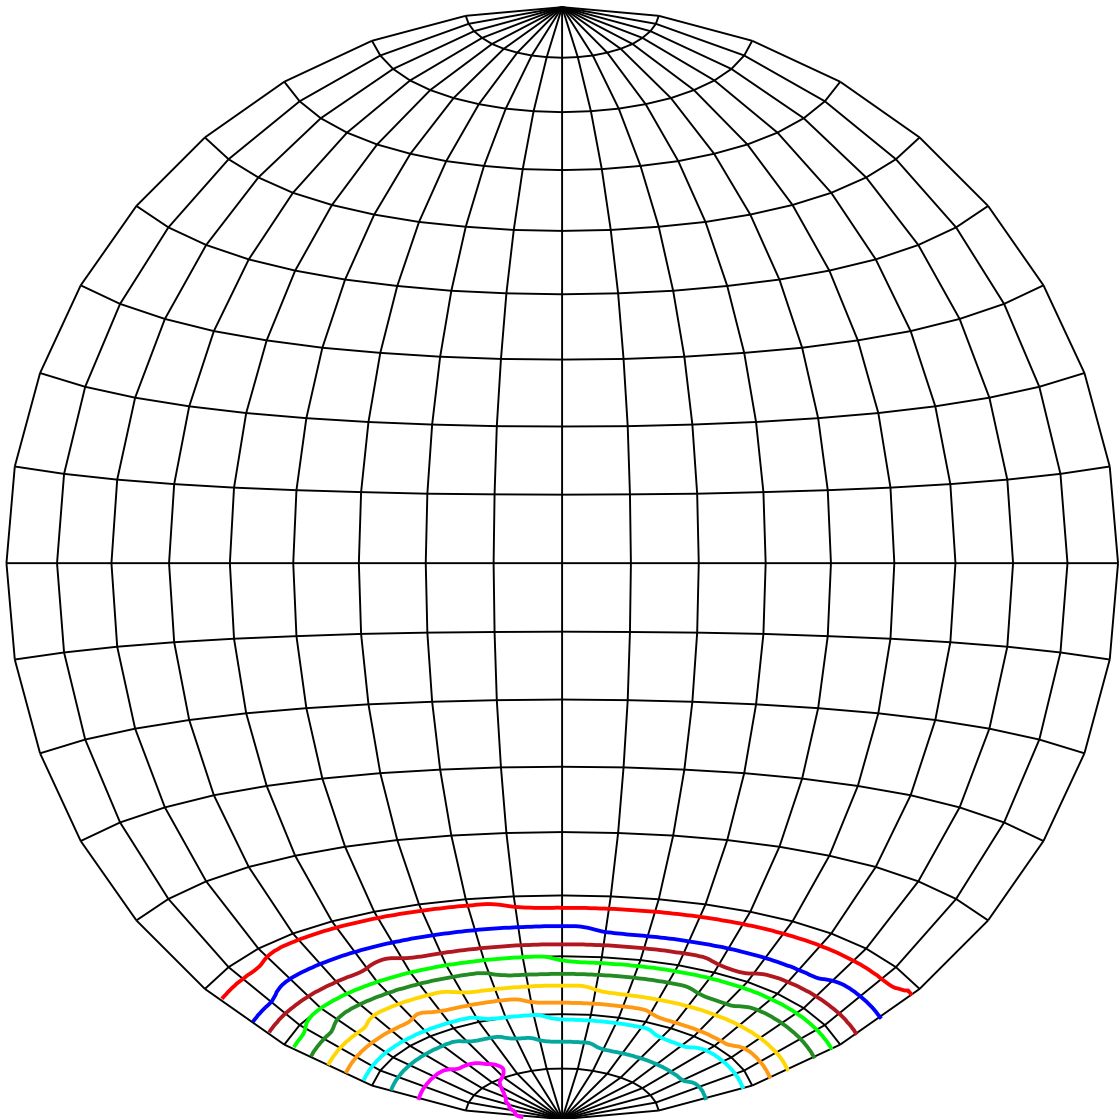


Unit of intensity:cd Imax(100%): 560.885 cd

- | | |
|--------------------|--------------------|
| — 532.841(95%Imax) | — 280.443(50%Imax) |
| — 504.797(90%Imax) | — 224.354(40%Imax) |
| — 448.708(80%Imax) | — 168.266(30%Imax) |
| — 392.62(70%Imax) | — 112.177(20%Imax) |
| — 336.531(60%Imax) | — 56.089(10%Imax) |

C角度范围: 0 - 360 Deg
C角度间隔: 45.0 Deg
测试速度: High
环境温度:
测试人员:
测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
G角度间隔: 1.0 Deg
测试系统: Huipu CPM-1800B Goniophotometer
环境湿度:
测试距离: 9.22 m
备注:

平面等照度曲线

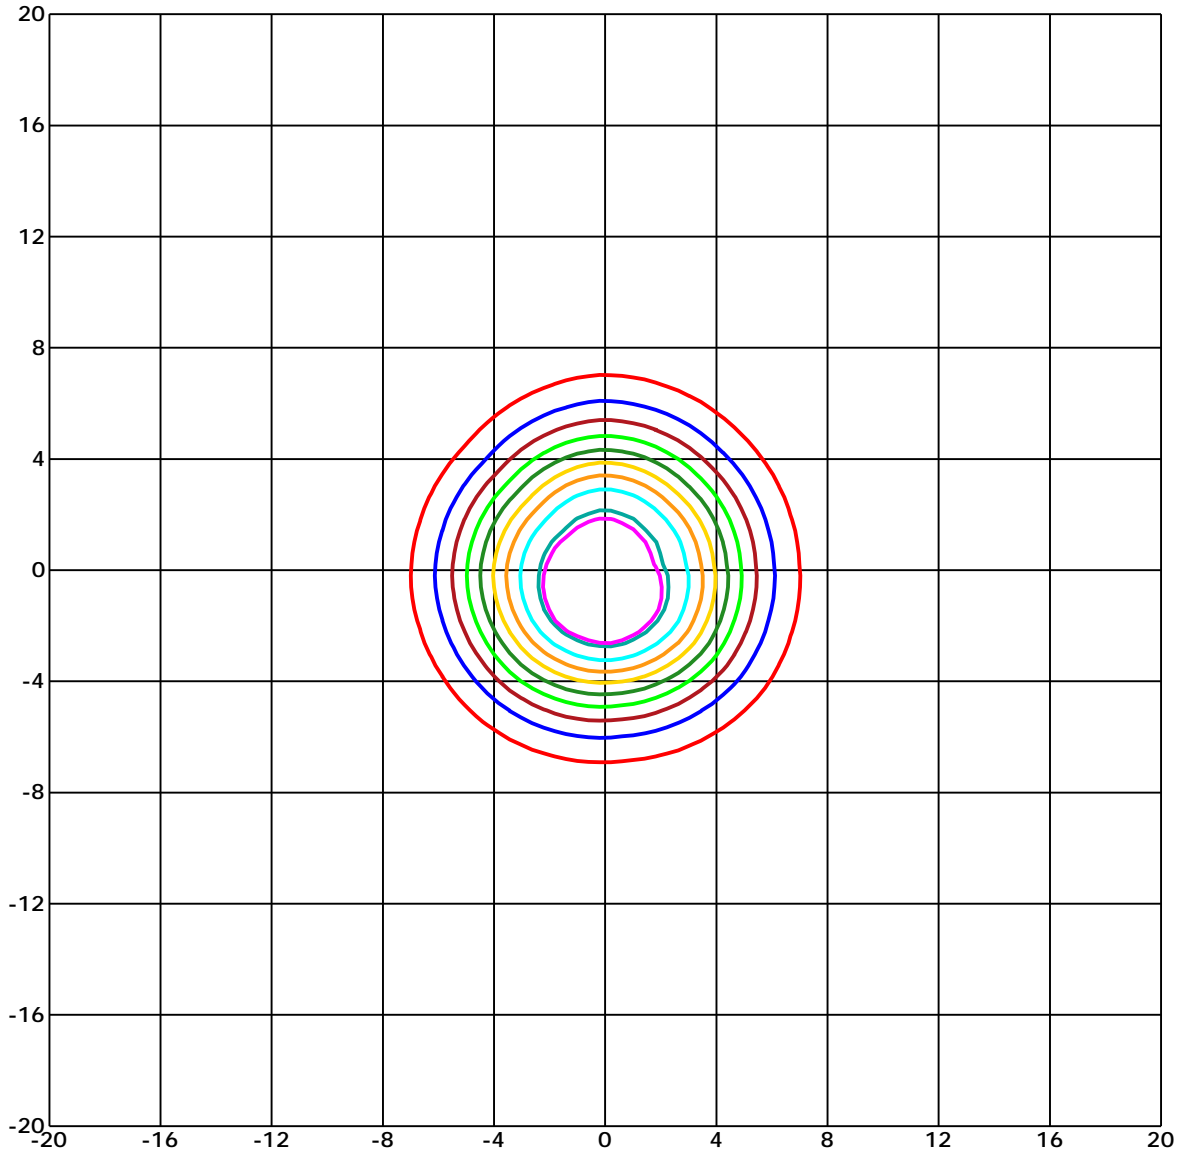

Unit of illumination: lx


Height of plane: 10.0(m)/32.81(ft)

- | | |
|------------------------------|------------------------------|
| — 4.932(1%E _{max}) | — 2.68(0%E _{max}) |
| — 4.824(1%E _{max}) | — 2.144(0%E _{max}) |
| — 4.288(1%E _{max}) | — 1.608(0%E _{max}) |
| — 3.752(1%E _{max}) | — 1.072(0%E _{max}) |
| — 3.216(1%E _{max}) | — 0.536(0%E _{max}) |

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

路灯利用系数曲线

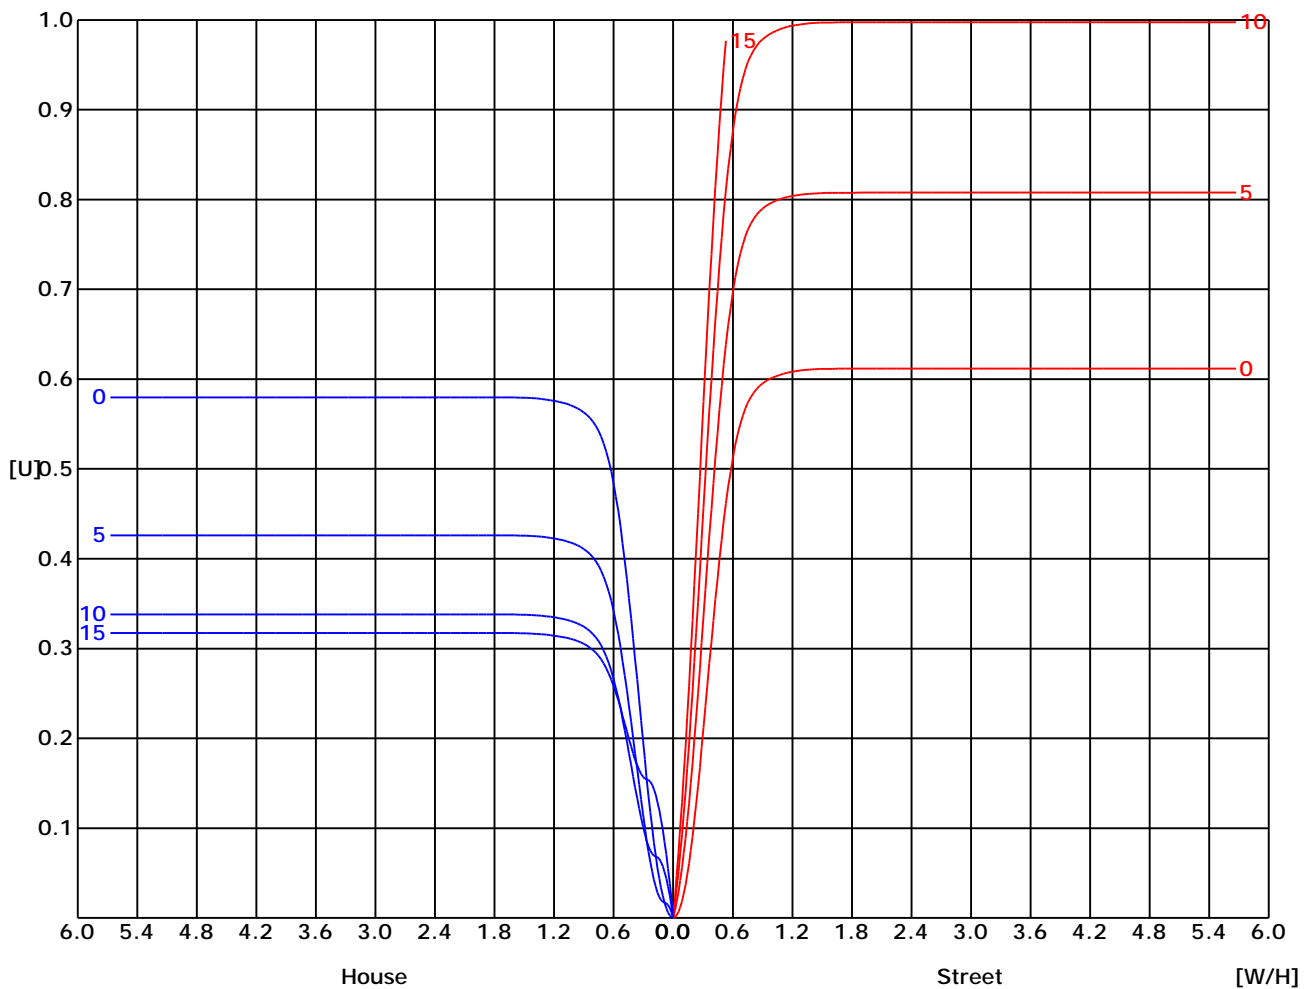


C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

亮度限制曲线

C/G	45	50	55	60	65	70	75	80	85
C0	3043	1467	394	0	0	0	0	0	0
C90	2536	1261	278	0	0	0	0	0	0
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

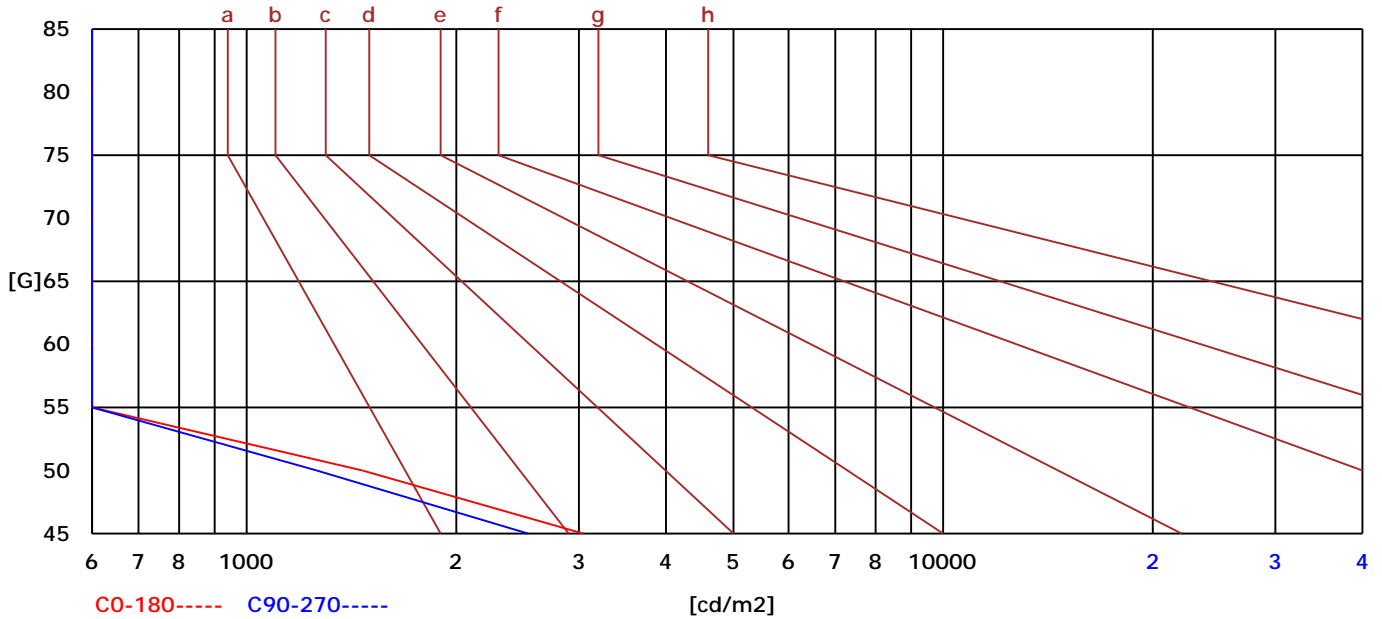


C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

报告编号:

测试时间: 2023-6-1 14:36:16

照度距离曲线

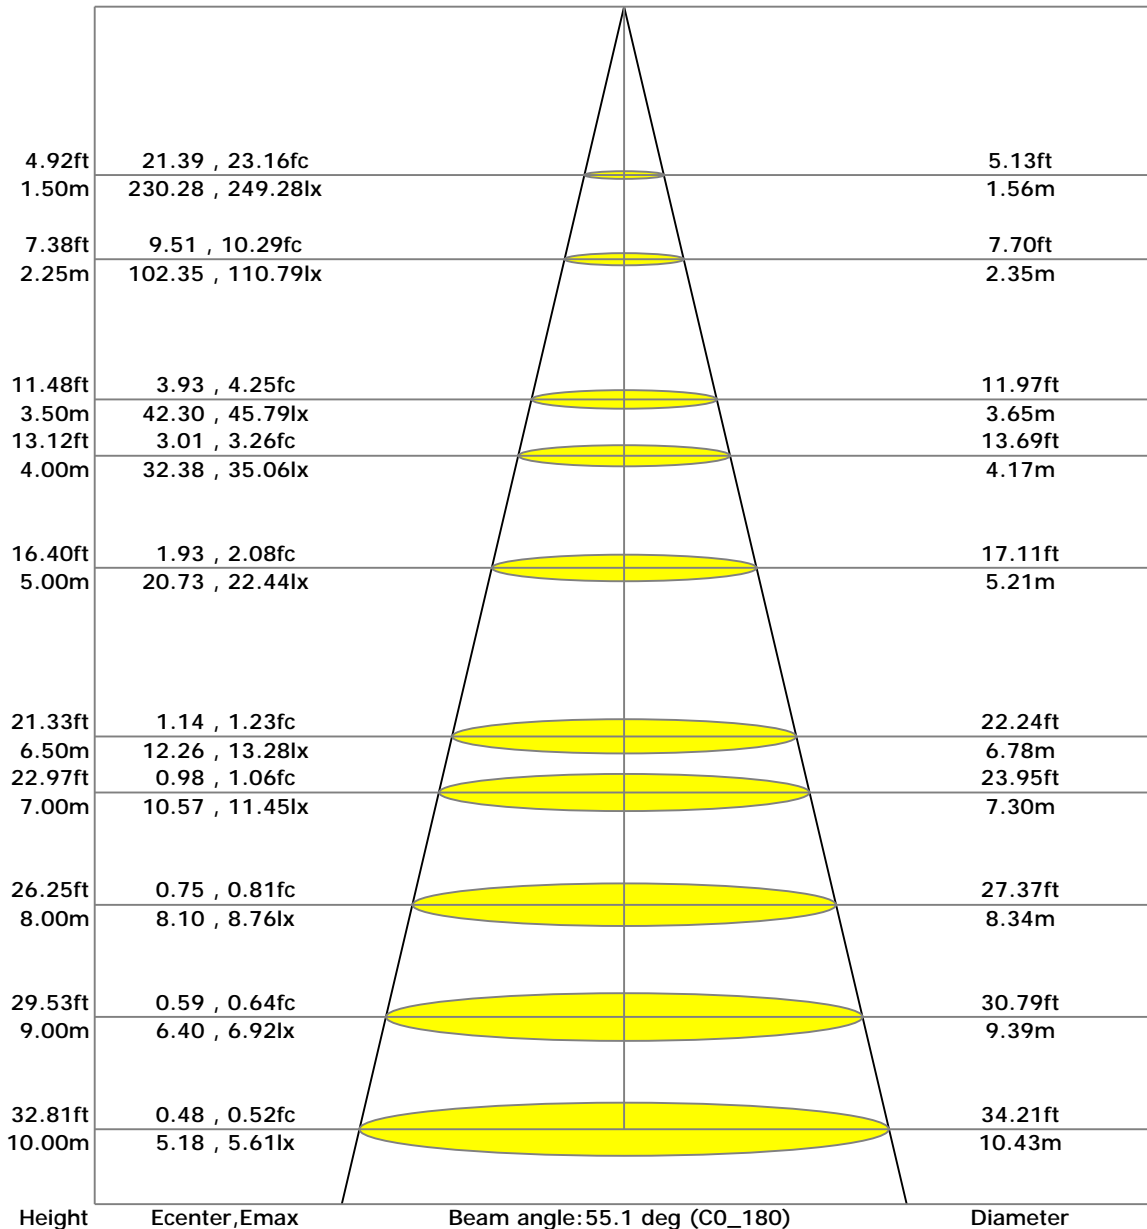

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

报告编号:

测试时间: 2023-6-1 14:36:16

UGR(Unified Glare Rating) TABLE

天花板反射比	70	70	50	50	30	70	70	50	50	30
墙面反射比	50	30	50	30	30	50	30	50	30	30
地面反射比	20	20	20	20	20	20	20	20	20	20
房间尺寸 X Y	向前 (Viewed Endwise)					交叉 (Viewed Crosswise)				
2H 2H	14.50	14.55	14.70	14.73	14.98	14.54	14.58	14.74	14.77	15.01
3H	14.47	14.52	14.68	14.71	14.96	14.51	14.56	14.72	14.75	15.00
4H	14.46	14.51	14.67	14.70	14.95	14.50	14.54	14.71	14.74	14.99
6H	14.44	14.49	14.66	14.69	14.94	14.48	14.53	14.69	14.73	14.98
8H	14.43	14.48	14.65	14.68	14.94	14.47	14.52	14.69	14.72	14.97
12H	14.42	14.47	14.64	14.68	14.93	14.46	14.51	14.68	14.72	14.97
4H 2H	14.46	14.51	14.67	14.70	14.95	14.50	14.54	14.71	14.74	14.99
3H	14.42	14.47	14.64	14.68	14.93	14.46	14.51	14.68	14.72	14.97
4H	14.40	14.45	14.63	14.66	14.92	14.44	14.49	14.67	14.70	14.96
6H	14.38	14.43	14.62	14.65	14.91	14.42	14.47	14.66	14.69	14.95
8H	14.37	14.42	14.61	14.64	14.91	14.41	14.45	14.65	14.68	14.95
12H	14.36	14.40	14.60	14.63	14.90	14.39	14.44	14.64	14.67	14.94
8H 4H	14.43	14.48	14.65	14.68	14.94	14.47	14.52	14.69	14.72	14.97
6H	14.34	14.39	14.60	14.62	14.90	14.38	14.42	14.64	14.66	14.93
8H	14.33	14.37	14.59	14.61	14.89	14.37	14.41	14.63	14.65	14.93
12H	14.31	14.35	14.58	14.60	14.88	14.35	14.39	14.62	14.64	14.92
12H 4H	14.36	14.40	14.60	14.63	14.90	14.39	14.44	14.64	14.67	14.94
6H	14.33	14.37	14.59	14.61	14.89	14.37	14.41	14.63	14.65	14.93

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

报告编号:

测试时间: 2023-6-1 14:36:16


区域光通量数据表

Gamma [deg]	I _{mean} [cd]	Zonal Flux [lm]	Sum Flux [lm]	Zonal Flux [%]	Sum Flux [%]
0	517.98	0.00	0.00	0.00	0.00
5	520.16	12.43	12.43	3.01	3.01
10	529.37	37.71	50.14	9.12	12.13
15	520.40	62.29	112.43	15.07	27.19
20	453.31	78.36	190.80	18.95	46.15
25	345.11	79.11	269.91	19.13	65.28
30	223.65	65.51	335.42	15.85	81.13
35	111.84	42.04	377.46	10.17	91.30
40	43.81	20.17	397.63	4.88	96.18
45	17.94	8.82	406.44	2.13	98.31
50	8.60	4.38	410.82	1.06	99.37
55	3.39	2.07	412.89	0.50	99.87
60	0.44	0.50	413.40	0.12	99.99
65	0.00	0.04	413.44	0.01	100.00
70	0.00	0.00	413.44	0.00	100.00
75	0.00	0.00	413.44	0.00	100.00
80	0.00	0.00	413.44	0.00	100.00
85	0.00	0.00	413.44	0.00	100.00
90	0.00	0.00	413.44	0.00	100.00

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

空间等照度曲线

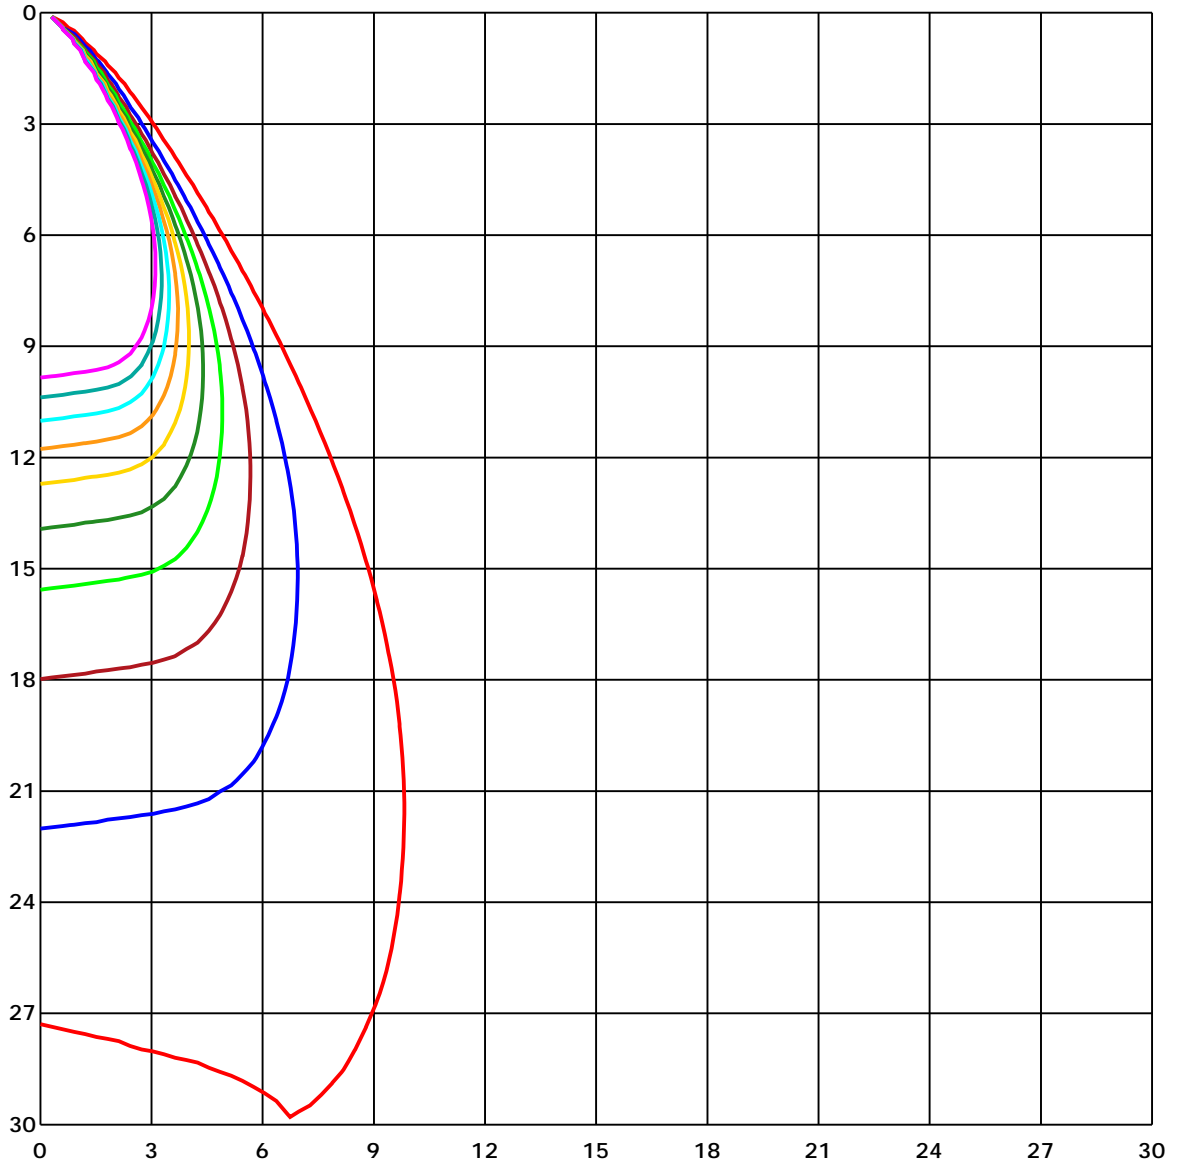

Unit of illumination: lx

- | | |
|---------|---------|
| — 5.345 | — 2.672 |
| — 4.81 | — 2.138 |
| — 4.276 | — 1.603 |
| — 3.741 | — 1.069 |
| — 3.207 | — 0.534 |

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

报告编号:

测试时间: 2023-6-1 14:36:16

光强分布数据

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	518.13	514.56	520.08	519.15	518.13	514.56	520.08	519.15	518.13	
G1	516.0	513.79	517.62	517.7	521.95	519.23	522.12	518.21	516.0	
G2	514.64	511.84	513.62	516.77	522.38	524.84	527.65	520.85	514.64	
G3	513.62	509.03	511.58	516.6	522.97	526.12	530.03	523.91	513.62	
G4	513.54	508.01	512.43	516.6	524.08	531.3	533.17	522.12	513.54	
G5	511.58	508.69	512.52	516.0	526.97	534.53	537.93	522.97	511.58	
G6	512.6	511.67	511.24	516.17	528.41	540.4	542.01	525.69	512.6	
G7	512.77	511.24	513.79	516.94	530.28	544.82	548.22	528.16	512.77	
G8	514.39	513.28	516.68	518.13	531.9	547.96	551.45	530.45	514.39	
G9	514.22	515.15	517.36	517.96	531.73	551.45	555.19	531.9	514.22	
G10	515.58	514.98	518.72	517.36	532.83	555.79	557.66	535.98	515.58	
G11	515.49	513.2	517.53	514.81	531.22	554.51	560.89	538.1	515.49	
G12	515.24	512.26	517.19	513.37	530.71	555.36	559.19	538.61	515.24	
G13	510.05	505.89	513.88	504.35	526.29	550.6	555.61	537.17	510.05	
G14	507.25	500.7	507.5	497.89	519.83	546.35	550.51	533.17	507.25	
G15	498.66	489.56	499.0	485.31	513.62	537.51	541.67	528.58	498.66	
G16	489.73	477.58	489.48	473.92	501.97	524.5	530.2	520.25	489.73	
G17	475.88	463.3	473.92	458.37	489.65	512.09	515.15	508.69	475.88	
G18	460.83	445.87	458.88	441.96	476.64	496.7	495.85	495.26	460.83	
G19	445.02	426.66	439.15	423.09	459.13	477.49	476.98	478.94	445.02	
G20	427.0	407.7	419.35	402.85	440.6	458.79	454.2	462.45	427.0	
G21	406.26	386.62	399.37	382.2	423.51	436.94	428.78	439.83	406.26	
G22	385.0	366.22	377.44	362.48	403.36	414.76	403.36	417.73	385.0	
G23	362.65	344.03	355.0	339.61	380.75	392.4	377.1	394.1	362.65	
G24	340.54	322.69	333.57	316.91	358.82	367.07	351.42	369.87	340.54	
G25	318.44	301.1	309.77	293.62	335.53	341.82	323.8	344.88	318.44	
G26	294.81	278.49	288.01	270.16	311.9	317.25	296.85	319.46	294.81	
G27	272.11	255.54	266.16	246.01	286.56	289.62	271.01	293.7	272.11	
G28	248.82	233.77	244.06	223.15	262.42	264.12	244.14	267.95	248.82	
G29	224.25	210.65	221.62	198.75	236.15	236.75	218.13	242.87	224.25	
G30	200.87	189.57	200.53	175.03	210.65	211.5	193.31	217.37	200.87	
G31	177.58	166.96	177.67	152.17	184.47	185.91	169.25	193.22	177.58	
G32	154.97	146.47	156.76	131.17	160.33	160.16	146.13	170.1	154.97	
G33	133.55	126.41	135.67	111.53	136.61	137.46	124.71	147.57	133.55	
G34	113.23	107.45	116.38	93.08	115.78	116.46	104.82	127.51	113.23	
G35	95.29	90.36	98.18	76.59	96.23	97.42	88.07	108.64	95.29	
G36	79.23	75.57	82.54	63.25	79.74	80.76	72.94	92.06	79.23	

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

报告编号:

测试时间: 2023-6-1 14:36:16

光强分布数据(Continue 1)

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	65.29	62.23	68.6	51.35	65.29	66.48	60.02	77.19	65.29	
G38	53.47	51.26	56.53	41.74	53.73	54.66	49.56	64.61	53.47	
G39	43.86	41.99	46.67	33.83	43.95	45.22	40.97	53.98	43.86	
G40	35.96	34.34	38.76	27.71	36.47	37.32	33.75	45.05	35.96	
G41	29.41	28.31	31.88	22.95	30.52	31.37	27.88	37.66	29.41	
G42	24.4	23.55	26.61	19.04	25.25	26.35	23.46	31.96	24.4	
G43	20.49	19.38	22.44	15.98	21.42	22.36	19.81	26.61	20.49	
G44	17.26	16.32	19.21	13.52	18.28	19.21	16.75	22.95	17.26	
G45	14.54	13.77	16.49	11.48	15.81	16.58	14.11	19.55	14.54	
G46	12.33	11.73	14.2	9.86	13.69	14.62	12.24	16.83	12.33	
G47	10.63	9.95	12.24	8.42	11.82	12.75	10.54	14.71	10.63	
G48	9.1	8.5	10.8	7.31	10.54	11.14	9.01	12.84	9.1	
G49	7.74	7.31	9.44	6.29	9.27	9.69	7.74	11.31	7.74	
G50	6.63	6.04	8.25	5.19	8.08	8.5	6.55	9.86	6.63	
G51	5.53	4.85	6.97	4.17	6.72	7.23	5.36	8.76	5.53	
G52	4.51	3.91	5.95	3.4	5.78	6.21	4.42	7.48	4.51	
G53	3.57	2.98	5.02	2.55	4.85	5.19	3.4	6.21	3.57	
G54	2.81	2.21	4.17	1.79	3.91	4.25	2.72	5.27	2.81	
G55	2.04	1.45	3.23	1.02	2.98	3.49	1.87	4.34	2.04	
G56	1.28	0.77	2.55	0.43	2.3	2.55	1.11	3.49	1.28	
G57	0.6	0.26	1.79	0.0	1.62	1.79	0.34	2.64	0.6	
G58	0.0	0.0	1.28	0.0	1.11	1.28	0.0	1.96	0.0	
G59	0.0	0.0	0.77	0.0	0.68	0.68	0.0	1.36	0.0	
G60	0.0	0.0	0.51	0.0	0.51	0.51	0.0	0.85	0.0	
G61	0.0	0.0	0.34	0.0	0.17	0.26	0.0	0.6	0.0	
G62	0.0	0.0	0.17	0.0	0.09	0.0	0.0	0.34	0.0	
G63	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.17	0.0	
G64	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G65	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G66	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G67	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G68	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G69	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G71	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G72	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G73	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C角度范围: 0 - 360 Deg
 C角度间隔: 45.0 Deg
 测试速度: High
 环境温度:
 测试人员:
 测试日期: 2023-6-1 14:36:16

G角度范围: 0 - 90 Deg
 G角度间隔: 1.0 Deg
 测试系统: Huipu CPM-1800B Goniophotometer
 环境湿度:
 测试距离: 9.22 m
 备注:

报告编号:

测试时间: 2023-6-1 14:36:16

光强分布数据(Continue 2)

Gamma\C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G74	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G75	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G76	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G77	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G78	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G79	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G81	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G82	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G83	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G84	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G85	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G86	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G87	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G88	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G89	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C角度范围: 0 - 360 Deg	G角度范围: 0 - 90 Deg
C角度间隔: 45.0 Deg	G角度间隔: 1.0 Deg
测试速度: High	测试系统: Huipu CPM-1800B Goniophotometer
环境温度:	环境湿度:
测试人员:	测试距离: 9.22 m
测试日期: 2023-6-1 14:36:16	备注: